


Ce document est la propriété exclusive de TECOFI. Toute communication ou reproduction de ce document, sous quelque forme que ce soit, et toute exploitation ou communication de son contenu sont interdites, sauf autorisation écrite expresse. Tout manquement à cette règle est illicite et expose son auteur au versement de dommages et intérêts. Tous droits réservés pour le cas de la délivrance d'un brevet, d'un modèle d'utilité ou d'un modèle de présentation. Les photographies et les illustrations techniques ne sont pas contractuelles. Les spécifications des produits présentés sont susceptibles de modifications sans avis préalable. Ils ne peuvent être invoqués, à aucun moment, par le client à l'encontre de TECOFI.

This document is the exclusive property of TECOFI. The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization are prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design. Photos and technical art works are not contractual. The specifications of the presented products are open to modifications without previous advice. They cannot be called, at any time, by the customer against TECOFI.


DN		L	B	H	Poids / Weight (kg)
mm	inch				
15	1/2"	175	127	219	6.9
20	3/4"	175	127	219	6.9
25	1"	175	127	219	7

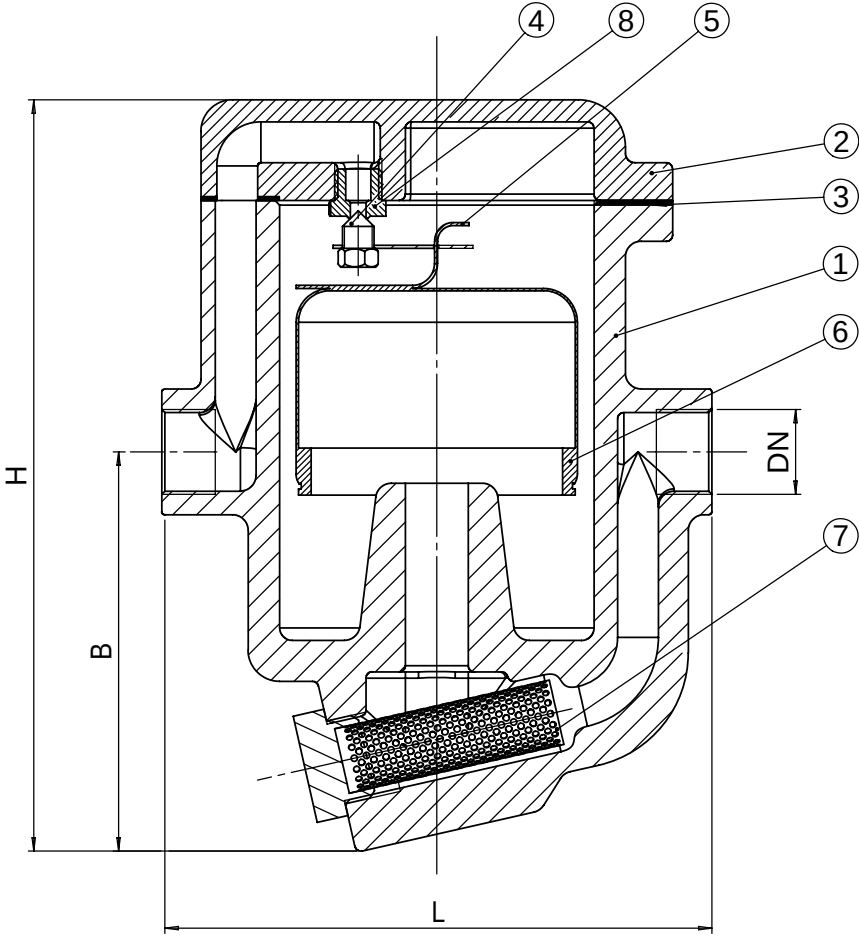

CONDITIONS DE SERVICE /
PRESSURE TEMPERATURE RATING

PS : 14 bar
T : + 230 °C

PS max : 16 bar
T max : + 250 °C

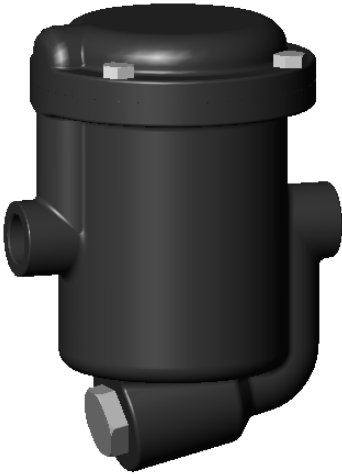

Taroudage gaz suivant la norme ISO 228-1.
BSP threaded according to standard ISO 228-1.

8	1	Siège / Seat	AISI 410	
7	1	Crépine / Strainer screen	Inox / Stainless steel	
6	1	Seau / Bucket	Inox / Stainless steel	
5	1	Levier / Lever	Inox / Stainless steel	
4	1	Soupape / Valve	AISI 410	
3	1	Joint / Gasket	Sans amiante / Non abestos	
2	1	Chapeau / Bonnet	GGG 40	
1	1	Corps / Body	GGG 40	
Rep. Pos.	Nb. Qty.	Désignation Description	Matière Material	Remarque Remark
MODIF.	Ind. A	GD 15/11/05 Création initiale	B C	D E
		Dessiné par Drawn by GD	Vérifié par Approved by JO	Client Customer
		Titre Title	Affaire File Reference	
		Purgeur à flotteur inversé ouvert Inverted bucket steam trap DN 15-25	Echelle Scale	Date Date 15/11/2005
		No. Dessin Drawing Nb	Ind.	
		PFI 4140.doc		