


Ce document est la propriété exclusive de TECOFI. Toute communication ou reproduction de ce document, sous quelque forme que ce soit, et toute exploitation ou communication de son contenu sont interdites, sauf autorisation écrite expresse. Tout manquement à cette règle est illicite et expose son auteur au versement de dommages et intérêts. Tous droits réservés pour le cas de la délivrance d'un brevet, d'un modèle d'utilité ou d'un modèle de présentation. Les photographies et les illustrations techniques ne sont pas contractuelles. Les spécifications des produits présentés sont susceptibles de modifications sans avis préalable. Ils ne peuvent être invoqués, à aucun moment, par le client à l'encontre de TECOFI.

This document is the exclusive property of TECOFI. The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization are prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design. Photos and technical art works are not contractual. The specifications of the presented products are open to modifications without previous advice. They cannot be called, at any time, by the customer against TECOFI.

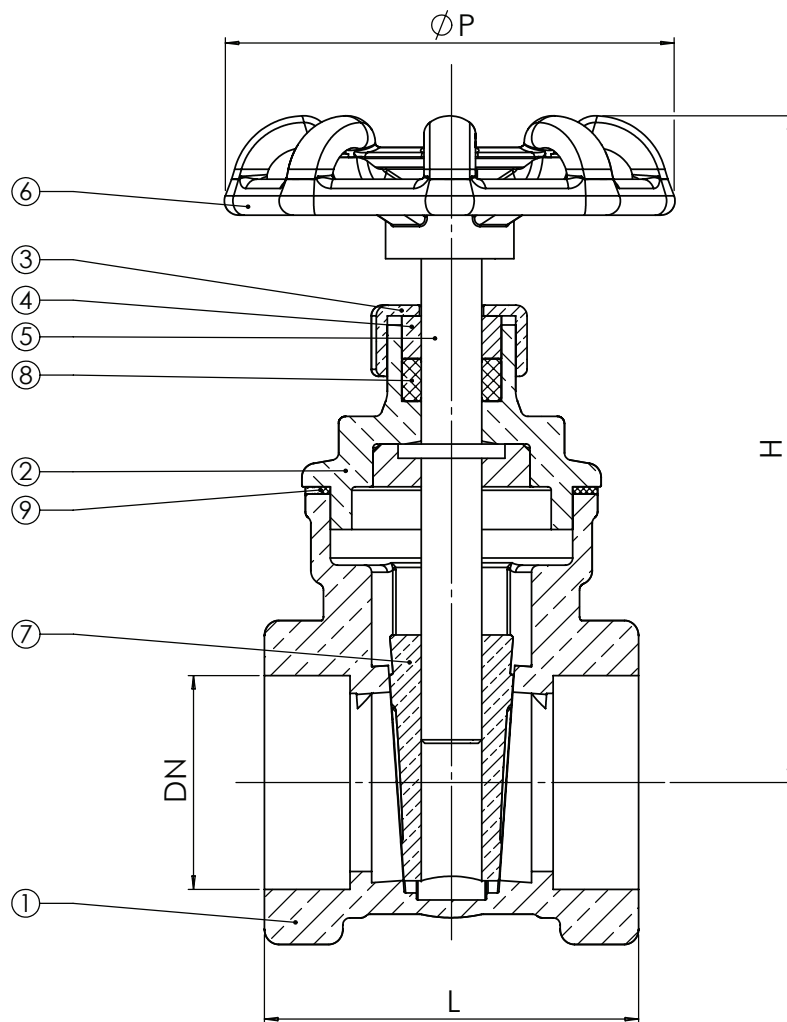

CONDITIONS DE SERVICE / PRESSURE TEMPERATURE RATING :

Pression maxi /
Maxi temperature : 10 bar (20°C)

Températures maximums /
Maximum temperature : -10°C / + 80°C

DN		L	H	ØP	Poids / Weight (kg)
mm	inch				
10	3/8"	33	67	44	0,17
15	1/2"	37	68	44	0,18
20	3/4"	40	68	49	0,24
25	1"	43	85	54	0,35
32	1"1/4"	48	103	69	0,55
40	1"1/2"	56	120	69	0,78
50	2"	60	145	78	1,1
65	2"1/2"	63	165	89	2,0
80	3"	73	182	98	2,5
100	4"	86	226	107	4,7



Taradage gaz suivant la norme ISO 228-1.
BSP threaded in accordance to standard ISO 228-1.

9	1	Joint de chapeau / Bonnet washer	PTFE	
8	1	Joint de tige / Stem packing	NBR	
7	1	Opercule / Wedge	Laiton / Brass	
6	1	Volant / Handwheel	Fonte d'aluminium / Aluminium iron	
5	1	Tige / Stem	Laiton / Brass	
4	1	Fouloir / Packing gland	Laiton / Brass	
3	1	Ecrou / Nut	Laiton / Brass	
2	1	Chapeau / Bonnet	Laiton / Brass	
1	1	Corps / Body	Laiton / Brass	
Rep. Pos.	Nb. Qty.	Désignation Description	Matière Material	Remarque Remark
MODIF.	PM 17/01/00	Création initiale	JO 25/07/05	Mise en 3D
	JO 12/12/03	Changement cotes d'encombrement	JO 04/10/07	Modifs tableaux
Dessiné par Drawn by		JO	Vérifié par Approved by	JO
Titre Title		Client Customer		
Affaire File Reference		Echelle Scale		
Date Date		04/10/2007		
No. Dessin Drawing Nb		V 1100.doc		
Ind.		C		



5, Impasse Pascal
Z.I. - BP 177
69686 CHASSIEU
FRANCE
Tel : +33 (0) 4 72 79 05 79
Fax : +33 (0) 4 78 90 19 19
E-mail : tecofi@tecofi.fr
Web : www.tecofi.fr

Vanne à passage direct / Gate valve
Taradé GAZ / BSP threaded
DN 1/4" - 4" PN10

No. Dessin
Drawing Nb
V 1100.doc
Ind.
C